

Tarpaulin setup - for „Fleximodal Runner“

// Foldable Tarpaulin setup with an optional ramp for a „Fleximodal Runner“ trailer.

§1 Application area

The Tarpaulin setup is fixed with screws on a "Fleximodal Runner" trailer and allows a weather-protected transport of cargo.


§2 Technical Data

| | |
|-------------------|--------------------------|
| Item number: | FR-PA |
| Material: | Aluminium, PVC-tarpaulin |
| Loading platform: | 1.06m ² |
| Loading volume: | 1.38m ³ |
| Closure: | stretch cord |



§3 Dimension and weight

| | |
|--------------------------------|---------------------|
| Length/Width/Height (outside): | 1655mm/660mm/1380mm |
| Length/Width/Height (inside): | 1590mm/612mm/1290mm |
| Height of the tub: | 176mm |
| Weight (without ramp): | 27.0 kg |
| Weight (with ramp): | 33.5 kg |

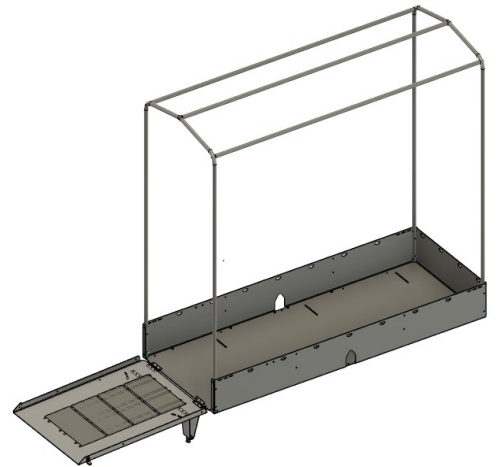

§4 Safety instructions

- Mount the tub on "Fleximodal Runner" using the supplied screws. Apply threadlocker (medium strength, not supplied) to the screws beforehand.
- When operating with a ramp, do not enter the rear part of the tub, otherwise there is a risk that the bike will fall over.
- Caution in (strong) winds – the driving style must be adjusted or the journey stopped if driving stability is impaired. The possibility of driving with the side walls rolled up can be examined.
- The „Fleximodal Runner“ trailer should be equipped with the „Fleximodal Inside wheel protector“ to avoid damage to the tarpaulin